

Hi 0171305, when you submit this form, the owner will be able to see your name and email address.

* Required

1. The heat delivered to the cooling water was from both compressor and condenser. *
(1 Point)

☐ True

☒ False

2. The unit has two evaporators, air evaporator and water evaporator *
(1 Point)

☐ True

☒ False

3. The heat absorbed from condenser is less than that absorbed from compressor. *

17. The flow rate in the reciprocating pump is almost constant. *
(1 Point)

☒ True

☐ False

18. The flow rate in the reciprocating pump generally higher than that of the centrifugal pump at the same speed. *
(1 Point)


☐ True

☒ False

19. The force on the plate is less than the force on the hemispherical cup. *
(1 Point)

☐ True

☐ False

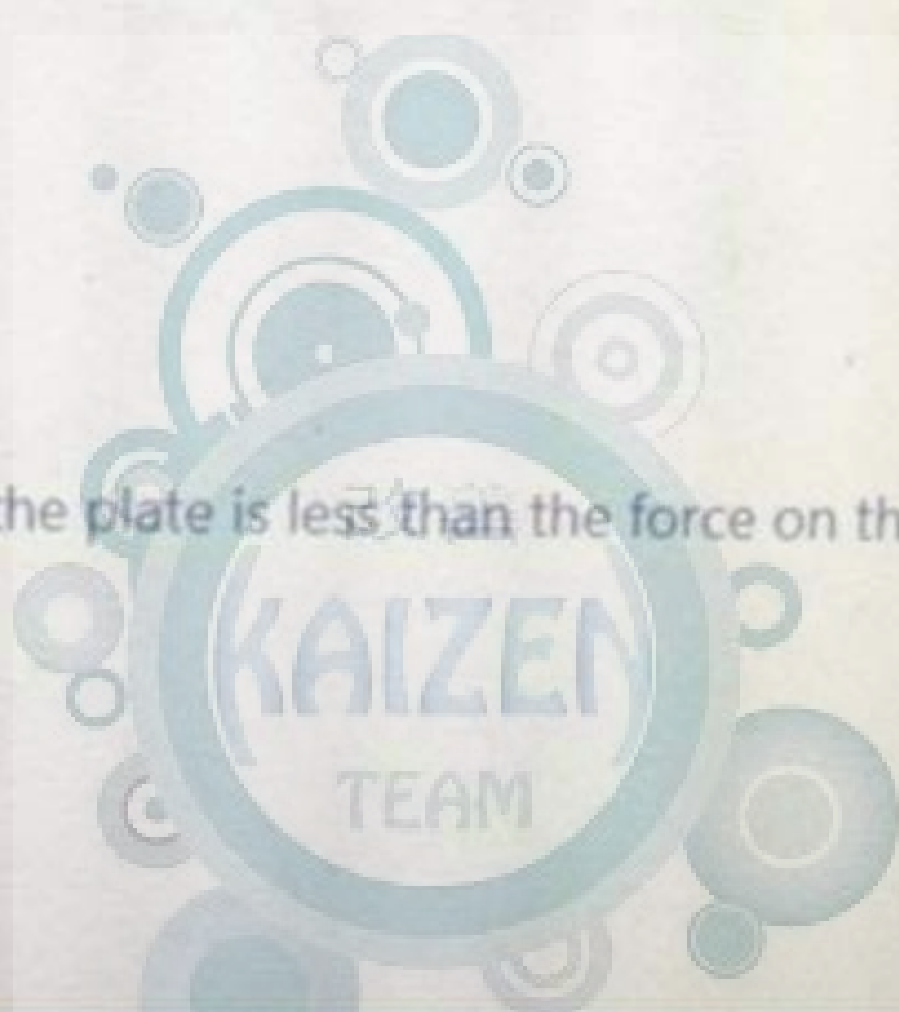

DELL

Search

Exam 26.05.2021 (Final Exam Thermal and fluid sciences laboratory)

☐ e) None of the above

30. Air enters an adiabatic nozzle steadily at 127°C with a velocity of 100 m/s and leaves at 77°C . The velocity at the nozzle exit is:
(2 Points)

☐ a) 561.30 m/s

☐ b) 648.46 m/s

☐ c) 461.11 m/s

☒ d) 333.14 m/s

☐ e) None of the above

Submit

改善

KAIZEN
TEAM

This content is created by the owner of the form. The data you submit will be sent to the form owner. Microsoft is not responsible for the privacy or security practices of its customers, including those of the form owner. Never give out your password.

Powered by Microsoft Forms (Download and updates) Terms of use

- ☒ a) For a positive displacement reciprocating pump, the amount of fluid flow rate is independent of pump rotational speed, ω .
- ☐ b) Pumps extract energy from the fluid passing through.
- ☐ c) Pressure of the fluid at the exit of the pump is lower than the pressure of the fluid at the inlet of the pump.
- ☐ d) The performance of the pump is measured using coefficient of performance.
- ☐ e) All of the above is not correct

25. In " Liquid-vapor saturation curve" experiment only one statement of the following is correct: (2 Points)

- ☐ a) Saturation pressure and temperature are independent from each other.
- ☐ b) Saturation pressure is the pressure at which the liquid changes phase into super-heated phase.
- ☒ c) Saturation temperature is the temperature at which the liquid becomes compressed liquid.
- ☒ d) Saturation temperature varies as pressure varies.
- ☐ e) None of the above is correct.

8. The pressure ratio is the back pressure divided by the chest pressure. *

(1 Point)

☒ True

☐ False

9. A honeycomb can be used to reduce turbulence intensity and to achieve a uniform low turbulence flow. *

(1 Point)

☒ True



☐ False

10. Oil mist is formed by the atomization of a heated mineral water in an air stream. *

(1 Point)

☐ True

☒ False

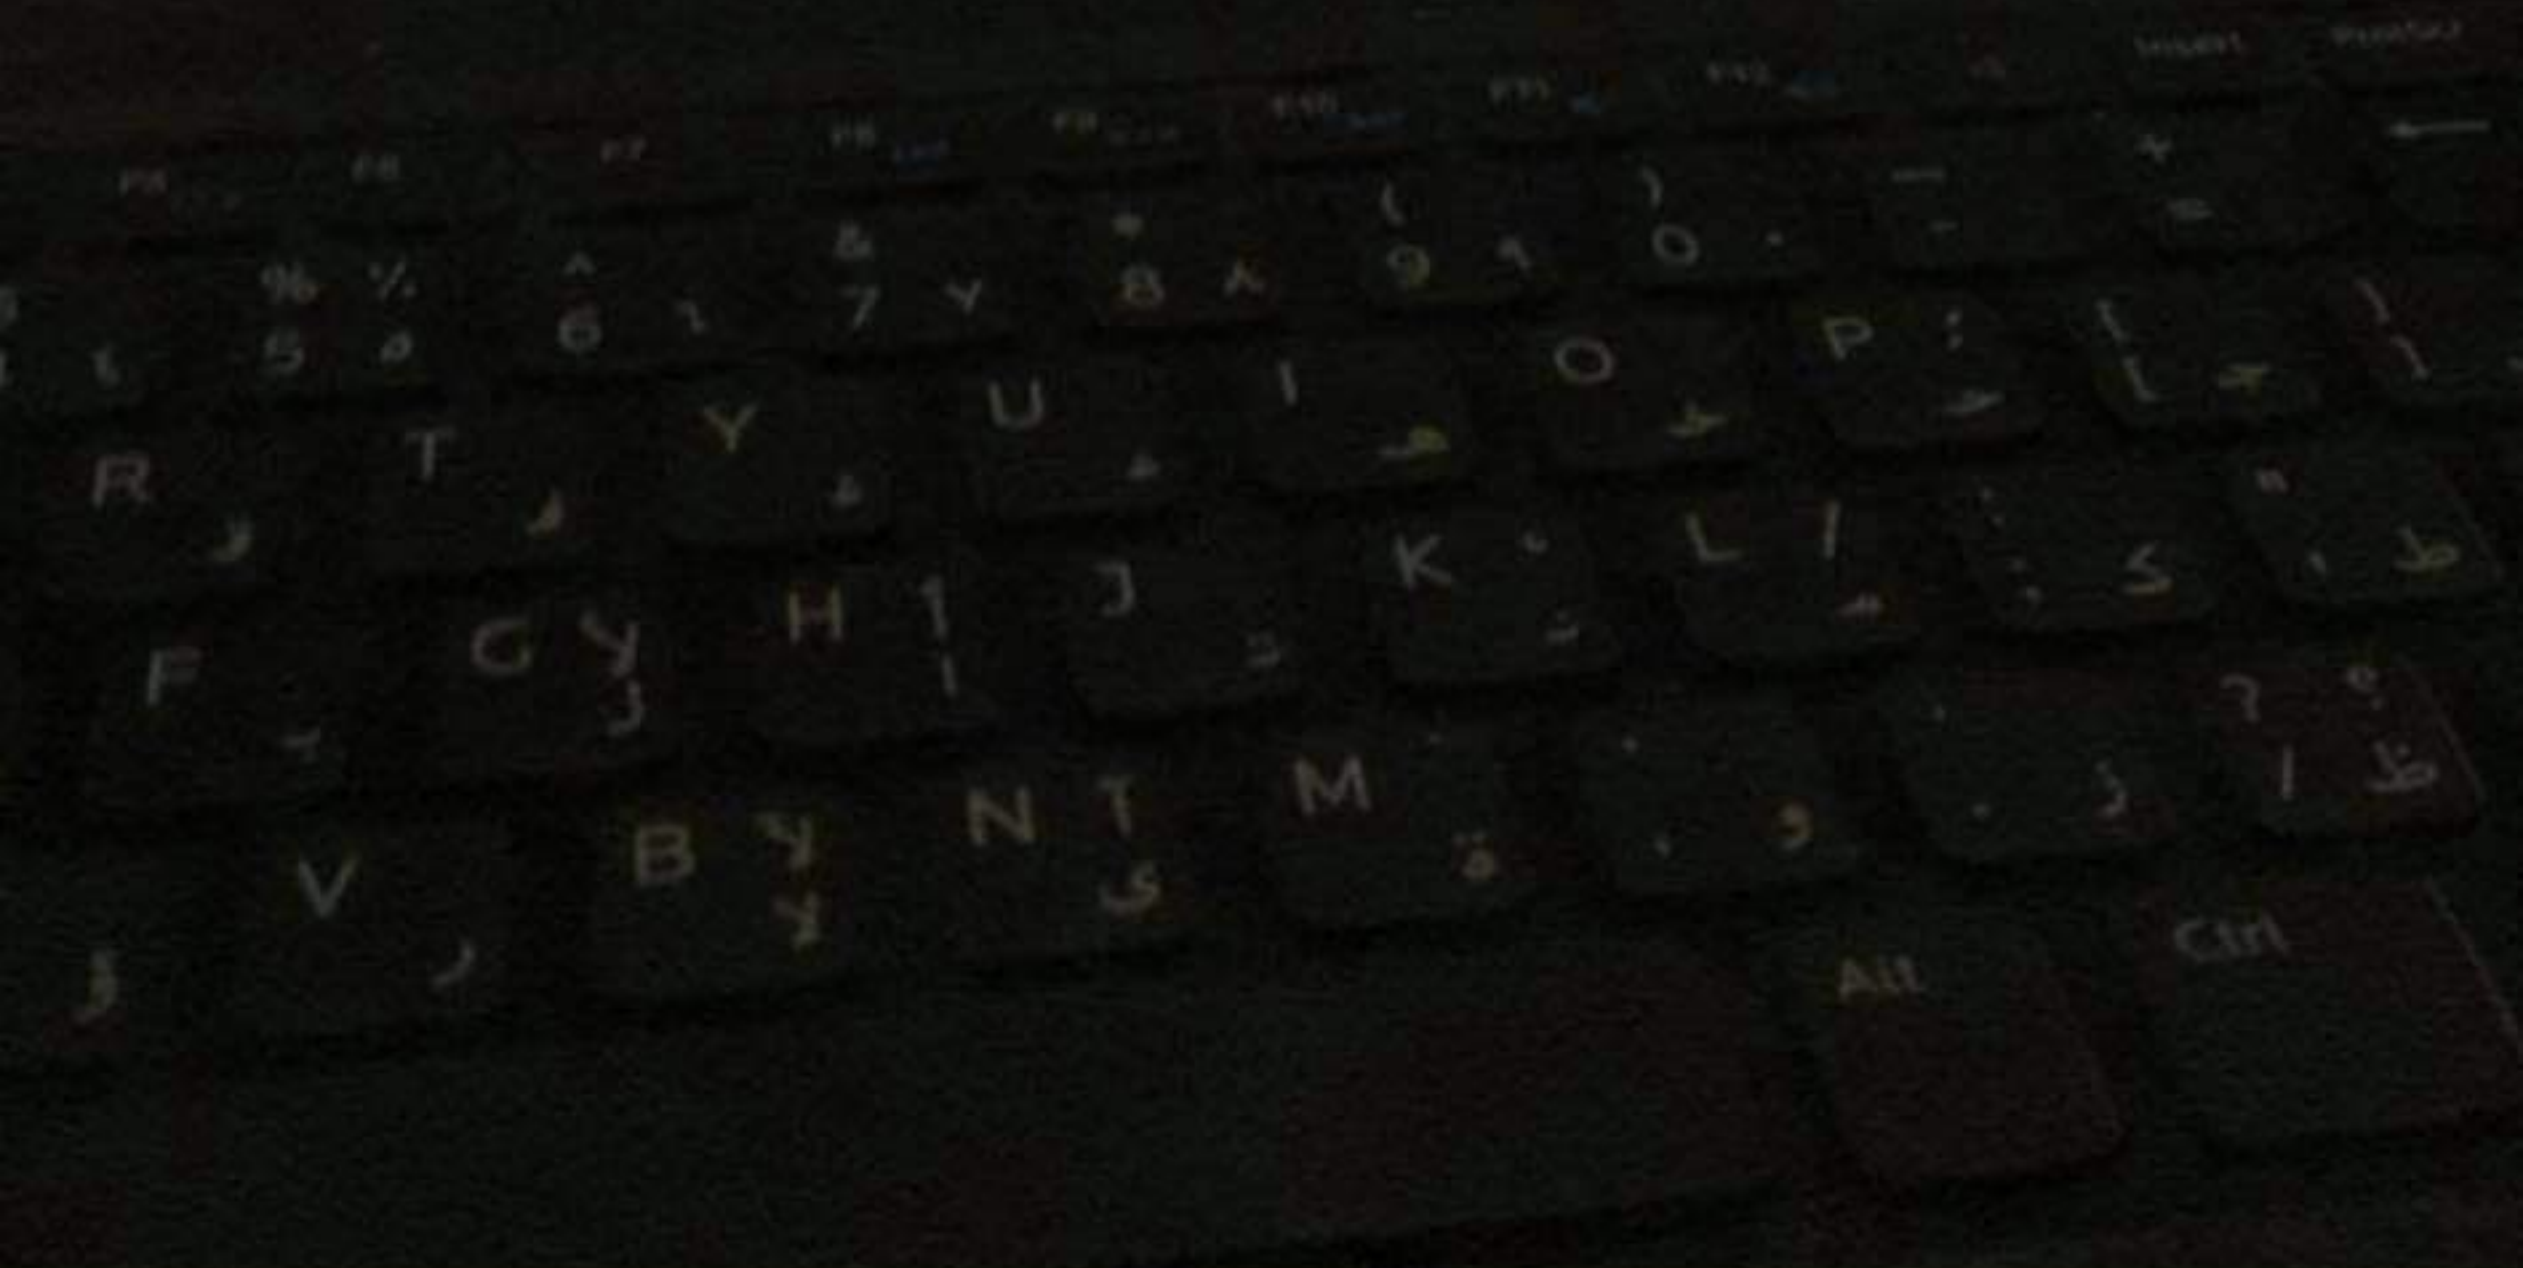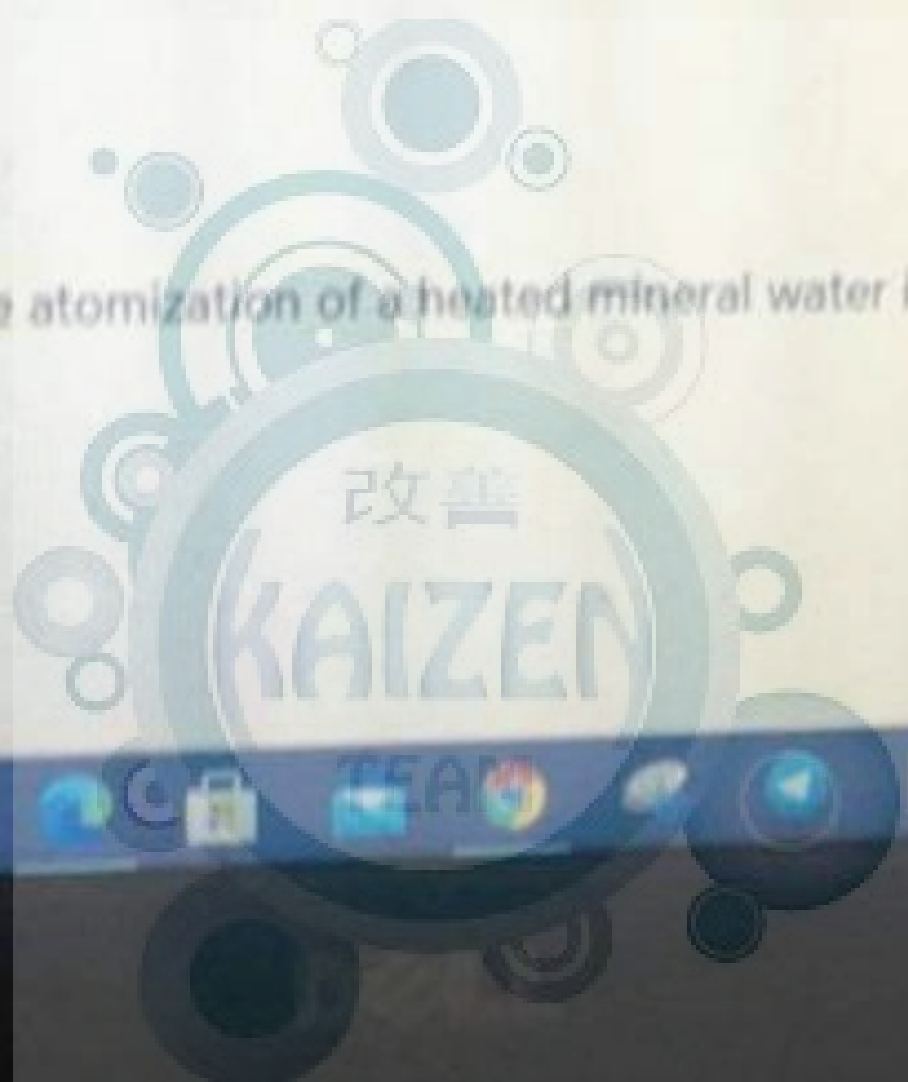

11. The smoke generated by burning fuel. *
(1 Point)



- ☒ True
☐ False

12. Separation occurs at high angle of attack. *
(1 Point)


- ☒ True
☐ False

13. Centrifugal pumps are useful for irrigation purposes, water supply to towns and feedi
boilers. *
(1 Point)

- ☒ True
☐ False

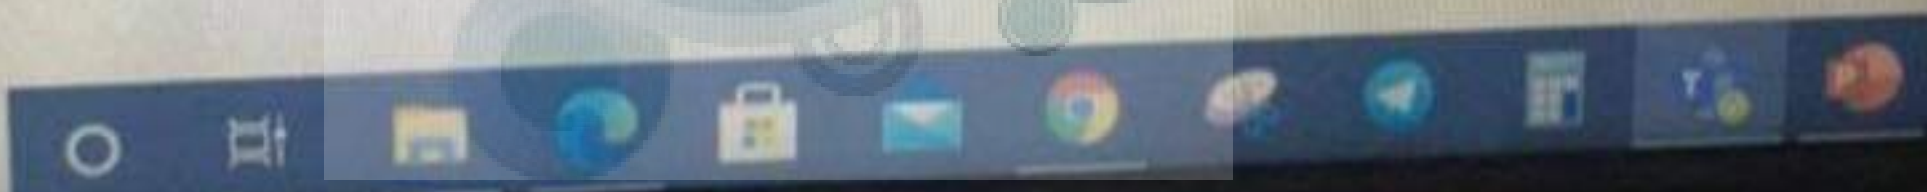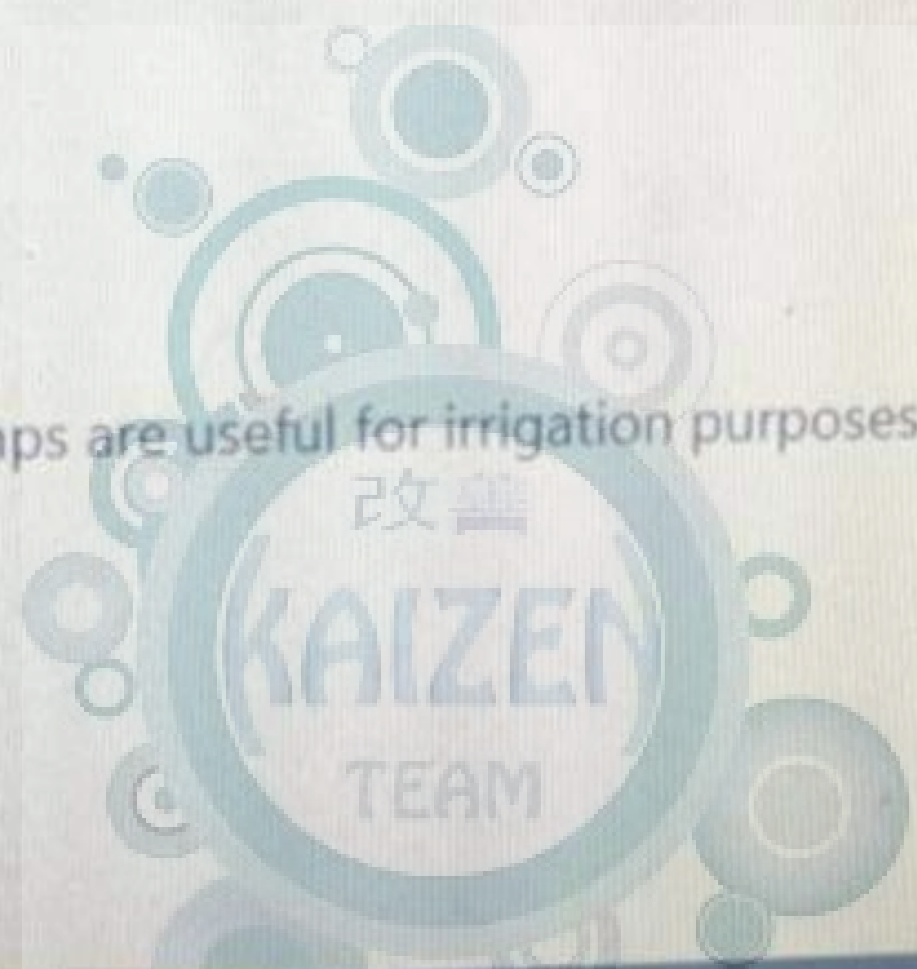

DELL

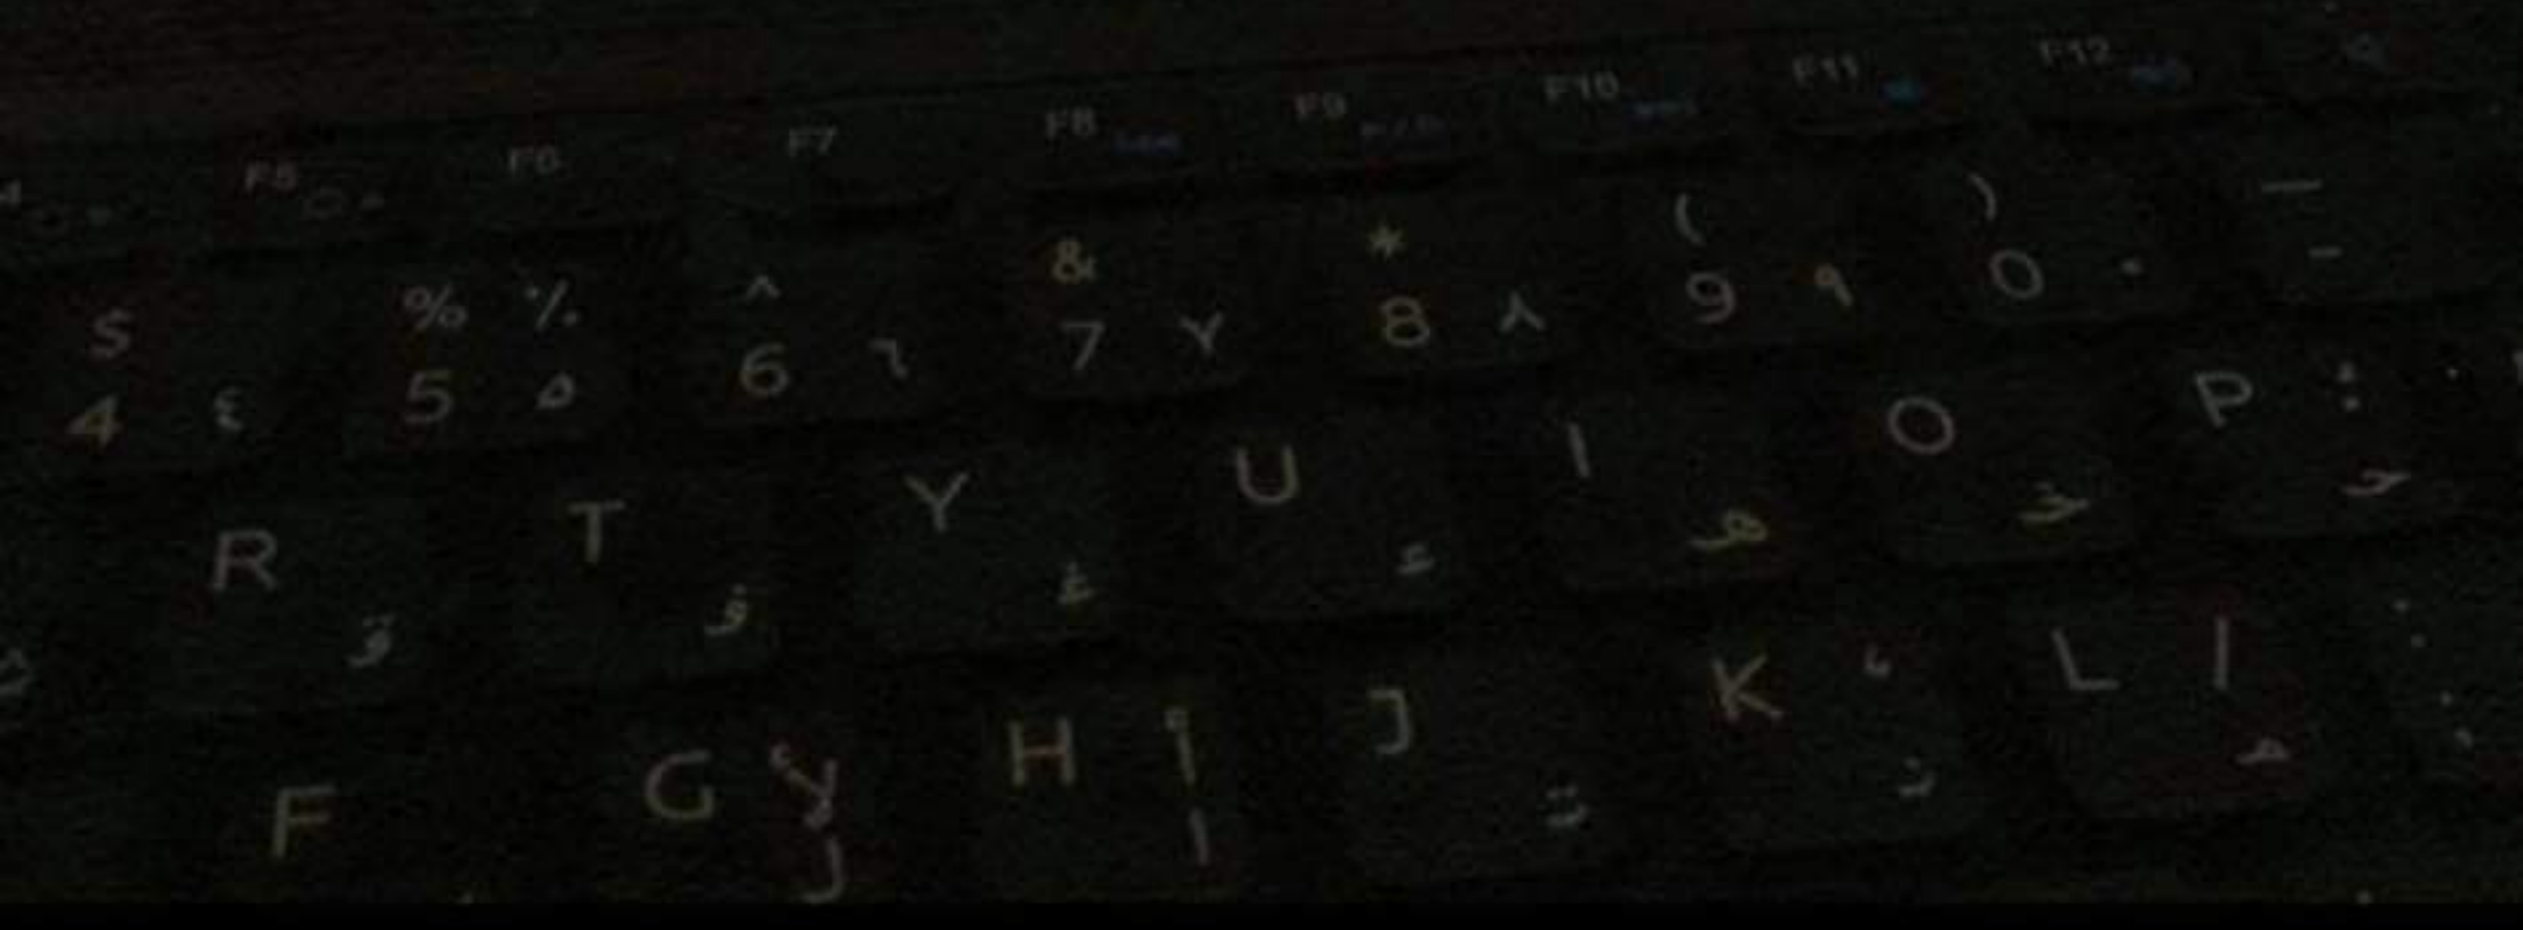

14. Reynolds number is defined as the ratio between viscous force to inertia force. *
(1 Point)

☐ True

☒ False

15. The flow rate in the positive displacement pump is almost constant. *
(1 Point)

☐ True

☒ False

16. As the flow rate in the centrifugal pump increases the head increases. *
(1 Point)

☐ True

☒ False




DELL

22. The type of the nozzle used in the "flow through a nozzle" experiment is:
(2 Points)

- ☒ a) Convergent-Parallel
- ☐ b) Divergent-Parallel.
- ☐ c) Convergent-divergent.
- ☐ d) Divergent-divergent.
- ☐ e) None of the above.

23. Only one of the following statement is correct with regards to the Flow through a nozzle experiment:
(2 Points)

- ☐ a) As pressure increase in the direction of the flow in the nozzle velocity decreases. opposite
- ☐ b) Both pressure and velocity decrease through the nozzle.
- ☐ c) Mass flow rate of the air increases as the area of the nozzle decreases.
- ☐ d) Cross section area of the nozzle increases in the direction of the flow.

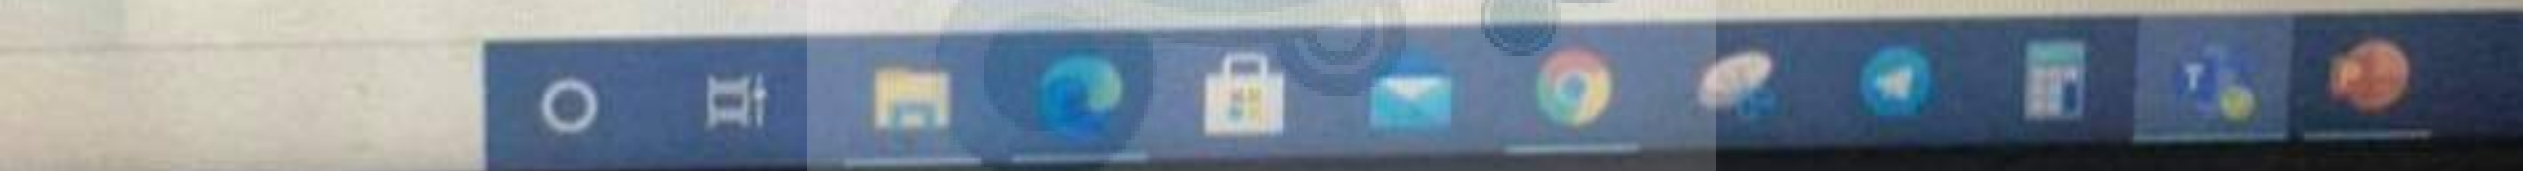

DELL



4. The heat absorbed by the evaporator was obtained from air flow drift by a fan *
(1 Point)

☒ True

☐ False

5. The nozzle profile where the experiment conducted on was Convergent-divergent * 
(1 Point)

☐ True

☒ False

6. The back pressure is the pressure in the throat area of the pipe. *
(1 Point)

☒ True

☒ False




28. For an insulated piston-cylinder system that have work done on it, one of the increase:
(2 Points)

- ☐ a) It's temperature
- ☐ b) It's pressure
- ☐ c) It's internal energy
- ☒ d) All of the above
- ☐ e) None of the above

29. For an insulated piston-cylinder system that have work done on it, one of the follow increase:
(2 Points)

- ☐ a) It's temperature
- ☐ b) It's pressure
- ☐ c) It's internal energy
- ☒ d) All of the above

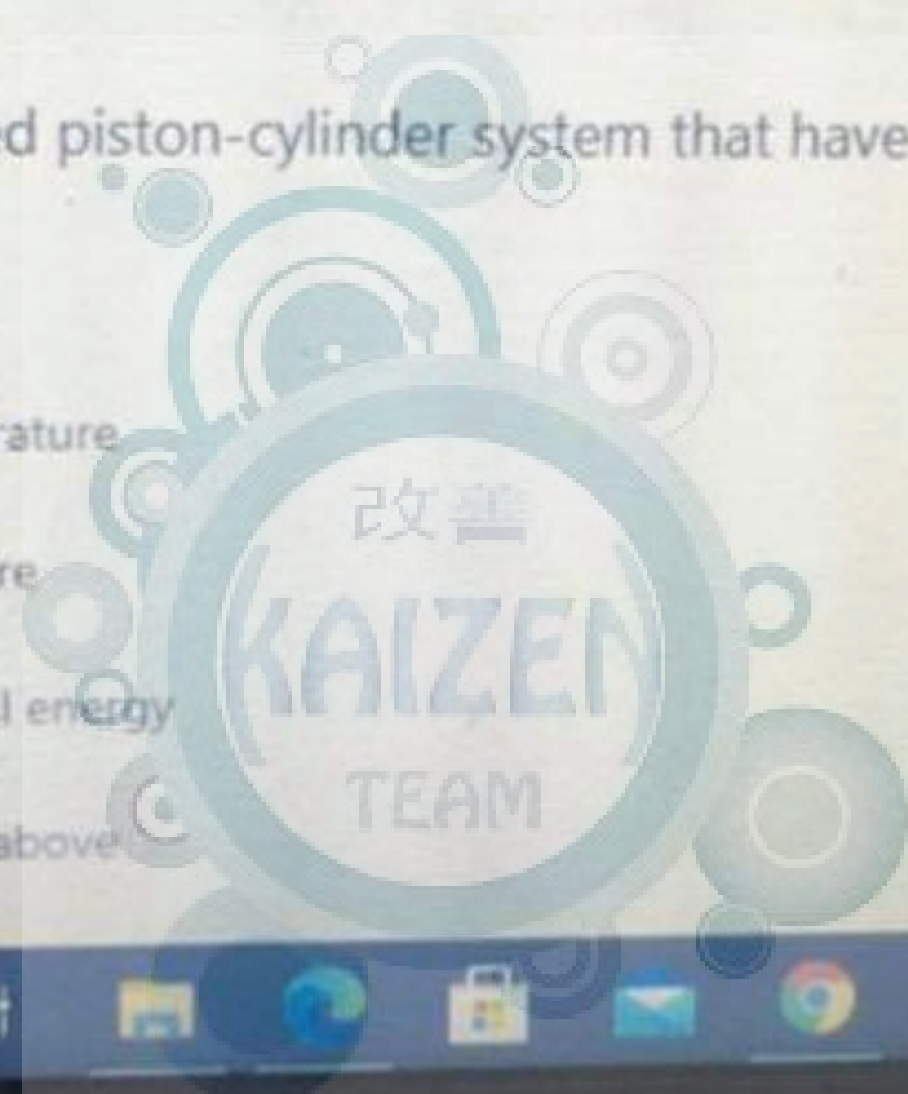

26. "Flow through a nozzle" experiment, one of the following statements is correct:
(2 Points)

- ☐ a) Throat pressure happens at the point where the spatial pressure change is maximum.
- ☐ b) Throat pressure is maximum pressure reading inside the nozzle.
- ☒ c) Throat pressure is minimum pressure reading inside the nozzle.
- ☐ d) Throat pressure is the gage pressure reading of the air supply tank.
- ☐ e) None of the above.

27. The specific volume of any fluid is:
(2 Points)

- ☐ a) An Extensive property
- ☒ b) An intensive property
- ☐ c) A Saturated liquid (v_f)
- ☐ d) A Saturated vapor (v_g)
- ☐ e) None of the above

改善
KAIZEN
TEAM



24. In "comparison of pump characteristic" experiment one of the following statement is correct (2 Points)

- ☒ a) For a positive displacement reciprocating pump, the amount of fluid flow rate is independent of pump rotational speed, ω .
- ☐ b) Pumps extract energy from the fluid passing through.
- ☐ c) Pressure of the fluid at the exit of the pump is lower than the pressure of the fluid at the inlet of the pump.
- ☐ d) The performance of the pump is measured using coefficient of performance.
- ☐ e) All of the above is not correct

25. In "Liquid-vapor saturation curve" experiment only one statement of the following is correct (2 Points)

- ☐ a) Saturation pressure and temperature are independent from each other.
- ☐ b) Saturation pressure is the pressure at which the liquid changes phase into super-heated phase.
- ☐ c) Saturation temperature is the temperature at which the liquid becomes compressed liquid.
- ☒ d) Saturation temperature varies as pressure varies.
- ☐ e) None of the above is correct

* Required

1. The heat delivered to the cooling water was from both compressor and condenser (1 Point)

☐ True

☒ False

2. The unit has two evaporators, air evaporator and water evaporator * (1 Point)

☒ True

☐ False

3. The heat absorbed from condenser is less than that absorbed from compressor. * (1 Point)


☒ True

☐ False



DELL

Quiz navigation

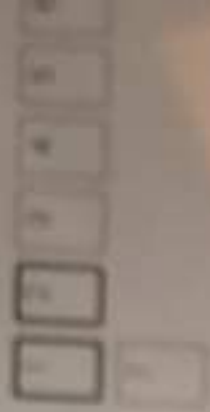

Time left 0:28:34

In center of pressure experiment, ($\rho_{water} \approx 1000 \text{ kg/m}^3$) With the following information: ($\theta = 0$)
 $m, b = 0.075\text{m}, c = 0.3 \text{ m}, d = 0.1 \text{ m}, h = 6 \text{ cm}, \text{ and } M = 75 \text{ g}$



m:33

The Theoretical y_{cp} in (cm) is:

Answer:

DELL

Done

In the Losses in Pipe Bends Experiment, The minor losses are due to friction and pipe fitting

True ☐False ☒

In the Thermal Conductivity Experiment, The thermal conductivity of the material is inversely proportional to its cross sectional area

True ☐False ☒

In the Losses in Pipe Bends Experiment, The friction factor is a function of Reynolds number

True ☒False ☐

More

6) In impact of water jet experiment, the water density is 1000 kg/m^3 , the mass flow rate is 0.4 kg/s , the height of vane above nozzle outlet is 0.04 m and the diameter of nozzle is 0.01 m . If a hemispherical cup is used, the theoretical water jet force is:

- a. 6.30 N
- ☒ b. 4.01 N
- c. 7.64 N
- d. 5.10 N
- a. None of the above

7) In "Flow through a nozzle" experiment, one of the following statements is correct:

☒ a. Throat pressure is minimum pressure reading inside the nozzle
b. Throat pressure is maximum pressure reading inside the nozzle
c. Mass flow rate is minimum if the nozzle is choked
d. Throat pressure is the gage pressure reading of the air supply tank
e. None of the above

8) Only one of the following statement is correct with regards to the Flow through a nozzle experiment:

a. As pressure increases in the direction of the flow in the nozzle, velocity decreases
b. Both pressure and velocity decrease through the nozzle
c. Mass flow rate of the air increases as the area of the nozzle decreases
d. Cross section area of the nozzle increases in the direction of the flow
☒ e. As the velocity increases in the direction of the flow, pressure decreases

9) In flow through a nozzle experiment, the stagnation "chest" absolute pressure is 290 kPa , the stagnation "chest" temperature is 18°C , the air gas constant is $0.287 \text{ kJ/kg}\cdot\text{K}$, the air specific heat ratio is 1.4 , nozzle throat area is $9.16 \times 10^{-6} \text{ m}^2$ and the throat absolute pressure is 265 kPa . The mass flow rate at nozzle throat is:

- ☒ a. $3.63 \times 10^{-3} \text{ kg/s}$
- b. $2.92 \times 10^{-3} \text{ kg/s}$
- c. $1.84 \times 10^{-3} \text{ kg/s}$
- d. $2.34 \times 10^{-3} \text{ kg/s}$
- e. None of the above

10) In losses in pipes experiment, pressure change in globe valve is measured using:

a. Pressurized piezometer tube	b. Piezoelectric gage pressure	c. U-tube manometer	d. Pitot-static tube	e. None of the above
--------------------------------	--------------------------------	---------------------	----------------------	----------------------

11) The type of the nozzle used in the "flow through a nozzle" experiment is:

a. Divergent-Parallel	☒ b. Convergent-Parallel	c. Convergent-divergent	d. Divergent-divergent	e. None of the above
-----------------------	---	-------------------------	------------------------	----------------------

Not yet answered
Marked out of 1.00
Flag question

Answer:

Time

Question 7
Not yet answered
Marked out of 2.00
Flag question

The P_{back} / P_{chest} ratio is:

Answer:

Previous page

Finish attempt

02041-taj20...pdf

the-nut-water-vet.pdf

1:55

KAIZEN
TEAM





13

1.5

220

The experimental $(P_t / P_o)_{exp}$ ratio is:

Answer:

Question 6

Not yet answered

Marked out of 1.00

Flag question

The theoretical $(P_t / P_o)_{theo}$ ratio for air is:

Answer:

868

Question 7

Not yet answered

Marked out of 1.00

The P_{back} / P_{atm} ratio is:

Answer:


7307

Type here to search

Windows taskbar icons



Done

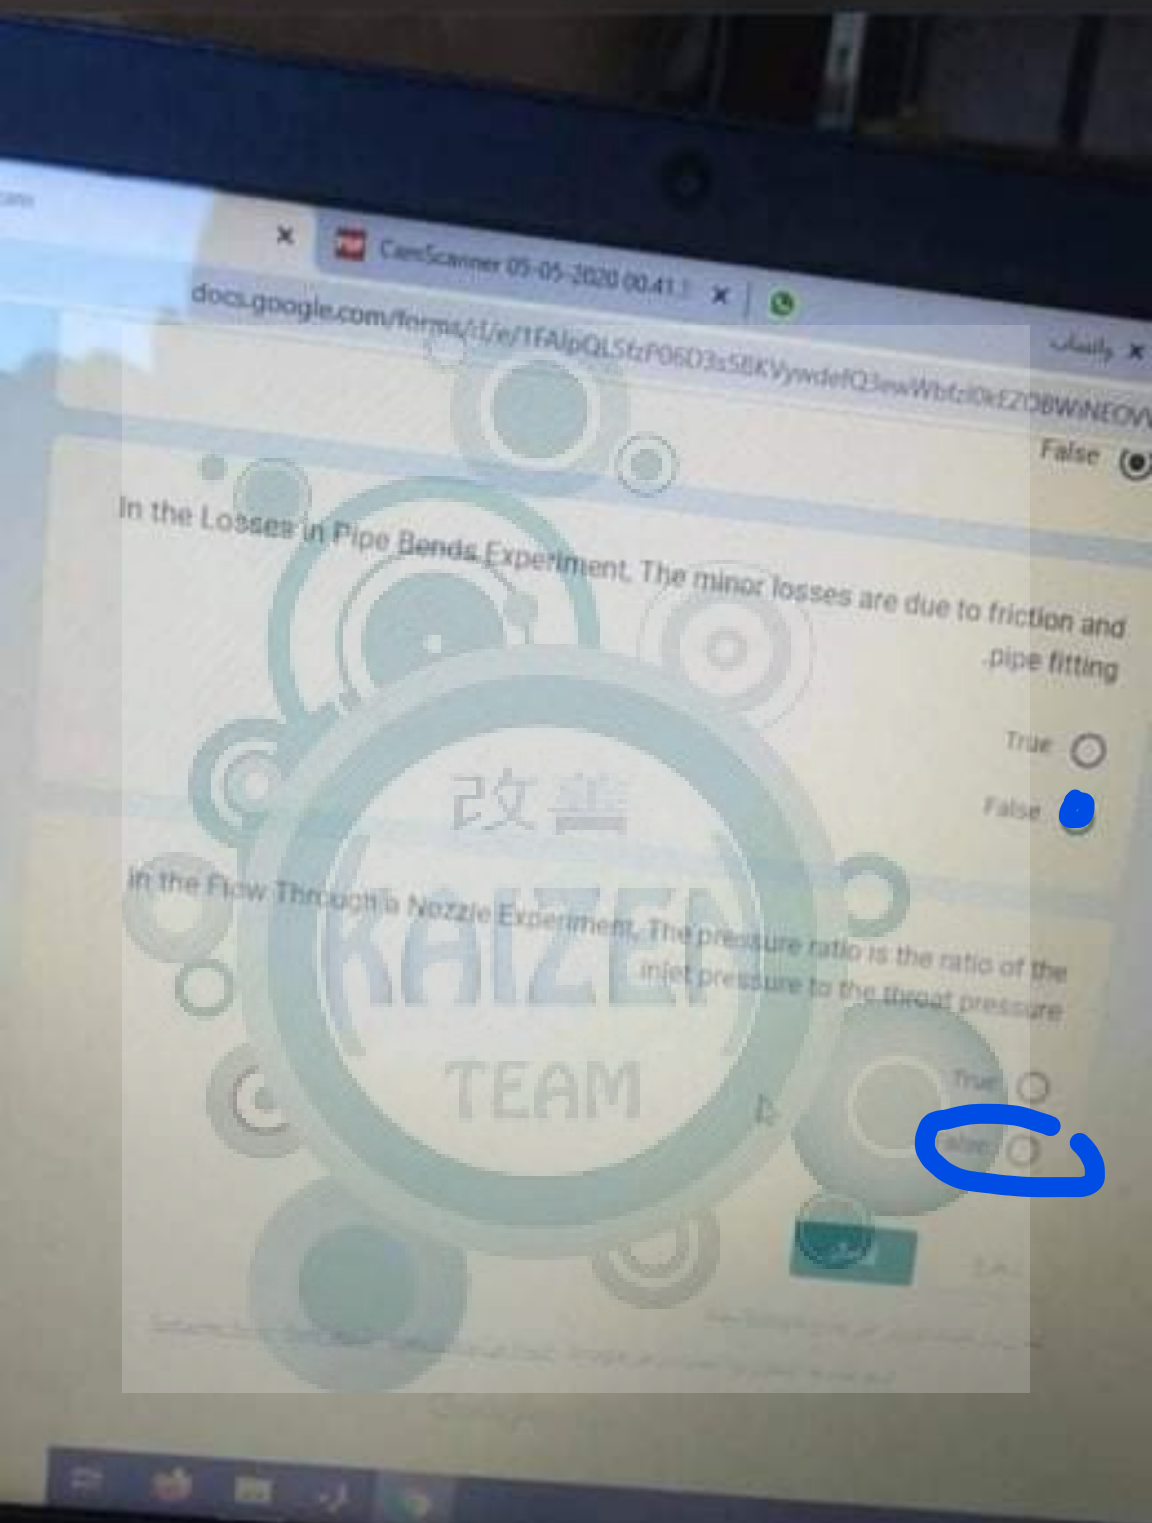

More

Question 1

Not yet answered

Marked out of 2.00

Flag question

In center of pressure experiment ($\rho_{\text{water}} = 1000 \text{ kg/m}^3$), with the following information: $a = 0.1 \text{ m}$, $b = 0.075 \text{ m}$, $c = 0.3 \text{ m}$, $d = 0.1 \text{ m}$, $h = 6 \text{ cm}$, and $M = 78 \text{ g}$.



The Theoretical y_{cp} in (cm) is

Answer:

The experimental y_{cp} in (cm) is:

Answer:

Time left 0:28:18

改進
KAIZEN
TEAM

Question 2

Not yet answered

Marked out of 2.00

Flag question

Results for the flat plate

Mass of water (kg)	Time (s)	Δx (mm)
7.5	14.27	75

The theoretical jet force in N is:

Answer:

The experimental jet force in N is:

Answer:

Question 4

Not yet
answered

Marked out of
1.00

Flag
question

In the Flow Through a Nozzle Experiment, The pressure ratio is the ratio of the

$$Pratio = Pback (outlet) / Pchest(inlet)$$

inlet pressure to the throat pressure

True ☐

False ☒




In the Hydrostatic Pressure Force on a Plane Surface Experiment, The pressure forces on the four surfaces other than the rectangular area were ignored

.because they are too small

True ☐

False ☒

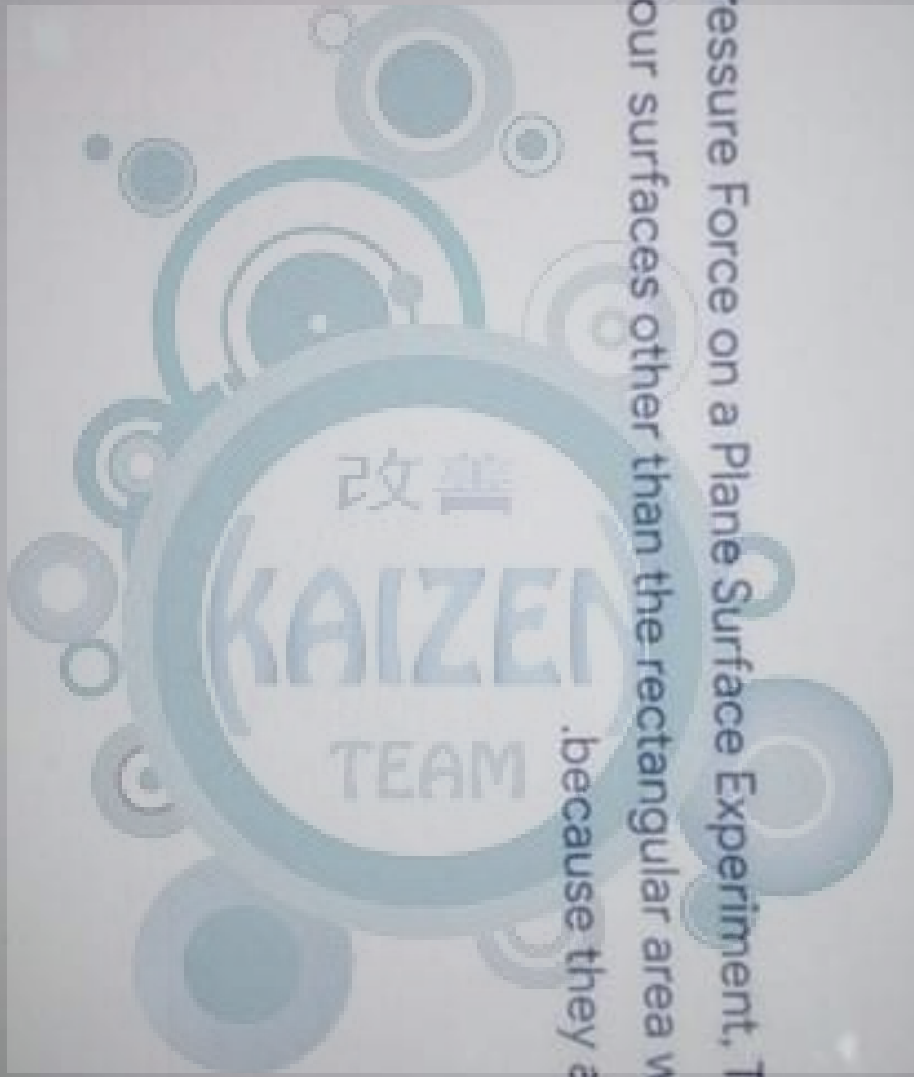

6) In impact of water jet experiment, the water density is 1000 kg/m^3 , the mass flow rate is 0.4 kg/s , the height of vane above nozzle outlet is 0.04 m and the diameter of nozzle is 0.01 m . If a hemispherical cup is used, the theoretical water jet force is:

- a. 6.30 N
- b. 4.01 N
- c. 7.64 N
- d. 5.10 N
- e. None of the above

7) In "Flow through a nozzle" experiment, one of the following statements is correct:

a. Throat pressure is minimum pressure reading inside the nozzle
b. Throat pressure is maximum pressure reading inside the nozzle
c. Mass flow rate is minimum if the nozzle is choked
d. Throat pressure is the gage pressure reading of the air supply tank
e. None of the above

8) Only one of the following statement is correct with regards to the Flow through a nozzle experiment:

a. As pressure increases in the direction of the flow in the nozzle, velocity decreases
b. Both pressure and velocity decrease through the nozzle
c. Mass flow rate of the air increases as the area of the nozzle decreases
d. Cross section area of the nozzle increases in the direction of the flow
e. As the velocity increases in the direction of the flow, pressure decreases

9) In flow through a nozzle experiment, the stagnation "chest" absolute pressure is 290 kPa , the stagnation "chest" temperature is 18°C , the air gas constant is $0.287 \text{ kJ/kg}\cdot\text{K}$, the air specific heat ratio is 1.4 , the nozzle throat area is $9.16 \times 10^{-6} \text{ m}^2$ and the throat absolute pressure is 265 kPa . The mass flow rate at the nozzle throat is:

- a. $3.63 \times 10^{-3} \text{ kg/s}$
- b. $2.92 \times 10^{-3} \text{ kg/s}$
- c. $1.84 \times 10^{-3} \text{ kg/s}$
- d. $2.34 \times 10^{-3} \text{ kg/s}$
- e. None of the above

10) In losses in pipes experiment, pressure change in globe valve is measured using:

a. Pressurized piezometer tube	b. Piezoelectric gage pressure	c. U-tube manometer	d. Pitot-static tube	e. None of the above
--------------------------------	--------------------------------	---------------------	----------------------	----------------------

11) The type of the nozzle used in the "flow through a nozzle" experiment is:

a. Divergent-Parallel	b. Convergent-Parallel	c. Convergent-divergent	d. Divergent-divergent	e. None of the above
-----------------------	------------------------	-------------------------	------------------------	----------------------

Pump characteristics

Centrifugal pump (13)

$$P_s = 0 \text{ bar}, P_d = 0.7 \text{ bar}, \dot{Q} = 3.2 \times 10^{-3} \frac{\text{m}^3}{\text{s}}, \rho = 1000 \frac{\text{kg}}{\text{m}^3}$$

$$F = 17.64 \text{ N}, \omega = 15 \text{ rev/s}, R = 0.15 \text{ m}$$

$$\eta_o = \frac{P_u}{P_b}$$

$$= \frac{0.224}{0.249}$$

$$= 0.899$$

$$\approx 0.901 \quad \textcircled{c}$$

$$P_{\text{pump}} (\text{Kw}) = \rho g \dot{Q} h_p \times 10^{-3} \text{ K}$$

$\frac{\text{kg}}{\text{m}^3} \quad \frac{\text{m}}{\text{s}^2} \quad \frac{\text{m}^3}{\text{s}} \quad \text{m}$

$$h_p = \frac{\Delta P}{\rho g} \times 10^5 = \frac{(P_d - P_s)}{\rho g} \times 10^5$$

$$= \frac{0.7 \text{ bar}}{(1000)(9.81)} \times 10^5 = 7.135 \text{ m}$$

$$P (\text{Kw}) = (1000)(9.81)(3.2 \times 10^{-3})(7.135) \times 10^{-3}$$

$$= 0.224$$

$$P_B (\text{Kw}) = 2\pi \omega m F R \times 10^{-3}$$

$$= 2\pi (15)(17.64)(0.15) \times 10^{-3}$$

$$= 0.249$$

(17) $P_s = 0 \text{ bar}, P_d = 0.4 \text{ bar}, \dot{Q} = 1 \times 10^{-3} \frac{\text{m}^3}{\text{s}}, \rho = 1000 \frac{\text{kg}}{\text{m}^3}, F = 17.64 \text{ N}$

$$\omega = 17.64 \text{ N}, R = 0.15 \text{ m}$$

$$\eta_v = \frac{\dot{Q}_m}{\dot{Q}_c}$$

$$= \frac{1 \times 10^{-3}}{2.04 \times 10^{-3}}$$

$$= 0.49 \quad \textcircled{d}$$

$$\dot{Q}_c = \left(\frac{0.75}{12.5} \right) \times 10^{-3} \times \omega_p \quad ; \quad \omega_p = 2 \omega_m$$

$$= 2(17)$$

$$= 34 \frac{\text{rev}}{\text{s}}$$

$$= \left(\frac{0.75}{12.5} \right) \times 10^{-3} \times 34$$

$$= 2.04 \times 10^{-3} \frac{\text{m}^3}{\text{s}}$$

For the following multiple choice questions, choose the most correct answer. For computations, show the detailed solution for each question to guarantee the grade. (2 points each)

[1-2]: In center of pressure experiment, if the plane surface is partially immersed, the water level $h=4.0$ cm, and the width of immersed surface $b=7.5$ cm. ($\gamma_{\text{water}} = 9810 \text{ N/m}^3$). Answer Problems (1-2)

$$b = 7.5 \text{ cm} \quad \gamma_{\text{water}} = 9810 \text{ N/m}^3$$

$$h = 4.0 \text{ cm}$$

- 1) The hydrostatic pressure force on the plane surface is:
- 0.59 N
 - 0.33 N
 - 0.92 N
 - 0.15 N
 - None of the above

- 2) The theoretical center of pressure measured from the surface of the water is:
- 3.33 cm
 - 1.33 cm
 - 2.67 cm
 - 2.00 cm
 - None of the above

- 3) Thermal conductivity of a material is

a. The resistance of a material to conduct heat through	
b. The ability of a solid material to store heat	
c. The ability of a material to conduct heat	
d. A measure of liquids ability to conduct heat	
e. All of the above	

[4-5] In the founch experiment, if the following data were measured: mass flow rate of 0.2 kg/s , density of water $\rho = 1000 \text{ kg/m}^3$, diameter of small pipe size 14 mm , dynamic viscosity of water is $\mu = 1 \times 10^{-3} \text{ N.s/m}^2$, roughness of the pipe surface is $\epsilon = 0.0015 \text{ mm}$. Answer Problems (4-5):

- 4) The Reynolds number is:
- 2100.12
 - 18189.14
 - 57142.86
 - 36378.27
 - None of the above

- 5) The friction factor is:
- 0.018
 - 0.034
 - 0.043
 - 0.027
 - None of the above

$$P = 10000 \text{ Pa}$$

F_w

Time left 0:10:09

Results for the flat plate

Mass of water (kg)	Time (s)	Δx (mm)
7.5	14.27	75

The theoretical jet force in N is:

Answer:

The experimental jet force in N is:

Answer:

改選

KAIZEN
TEAM

7 Flow through Nozzle

8 c.

a.

9 $P_0 = 290 \text{ kPa}$, $T = 18^\circ\text{C}$; $R = 0.287 \frac{\text{kJ}}{\text{kgK}}$, $\gamma = 1.4$

$A_e = 9.16 \times 10^{-6} \text{ m}^2$, $P_t = 265 \text{ kPa}$

$$\dot{m} = A_t P_0 \left(\frac{P_t}{P_0} \right)^{\frac{1}{\gamma}} \sqrt{\frac{\gamma}{(\gamma-1) R T_0} \left(1 - \left(\frac{P_t}{P_0} \right)^{\frac{\gamma-1}{\gamma}} \right)}$$

$$= (9.16 \times 10^{-6}) \uparrow \left(\frac{265}{290} \right)^{\frac{1}{1.4}} \sqrt{\frac{1.4}{(1.4-1) \cdot 287 \cdot (18+273)}} \left(1 - \left(\frac{265}{290} \right)^{\frac{1.4-1}{1.4}} \right)$$

a

$$= 3.63 \times 10^{-3} \text{ kg/s}$$

11 b. Convergent - Parallel

Time left 0:10

In flow through a nozzle experiment, with the following information.

The throat diameter is as follows:

For the convergent nozzle = 6.35 mm

For the convergent - divergent nozzle = 6.36 mm

For the convergent - parallel nozzle = 4.77 mm

Probe diameter = 3.33 mm

Atmospheric pressure = 90 kPa, atmospheric temperature = 15 °C, $R = 287 \text{ J/kg} \cdot \text{K}$, $\gamma = 1.4$

Table 1. The data collected in gage pressures

Position no.	X/L	$P_0 = 300 \text{ kPa}$ Position pressure kPa
7	0.0	300
8	0.25	300
9	0.5	300
10	0.75	290

thermal-vision-get.pdf



Atmospheric pressure = 80 kPa, atmospheric temperature = 16 °C, $R = 287 \text{ J/kg}$

Table 1. The data collected in gage pressures

Position no	x/l	$P_0 = 300 \text{ kPa}$	
		Position	pressure kPa
7	0.0		300
8	0.25		300
9	0.5		300
10	0.75		280
11			280
12	1.25		220
13	1.5		220

The experimental (P_1/P_0)exp ratio is

Answer: 0.866

Time left 0:02:01

You can choose to save files automatically or be prompted before downloading.

Go to settings

Don't ask again

For the following multiple choice questions, choose the *most correct* answer. For show the detailed solution for each question to guarantee the grade. (2 points)

[1-2]: In center of pressure experiment, if the plane surface is partially immersed, the water level is $h = 7.5$ cm. ($\gamma_{\text{water}} = 9810 \text{ N/m}^3$). Answer Problems (1-2):

1) The hydrostatic pressure force on the plane surface is:

- a. 0.59 N
- b. 0.33 N
- c. 0.92 N
- d. 0.15 N
- e. None of the above

2) The theoretical center of pressure measured from the surface of the water is:

- a. 3.33 cm
- b. 1.33 cm
- c. 2.67 cm
- d. 2.00 cm
- e. None of the above

3) Thermal conductivity of a material is

a. The resistance of a material to conduct heat through	
b. The ability of a solid material to store heat	
☒ c. The ability of a material to conduct heat	
d. A measure of liquids ability to convect heat	
e. All of the above	

[4-5] In the losses experiment, if the following data were measured: mass flow rate of 0.2 kg/s, density of water is $\rho = 1000 \text{ kg/m}^3$, diameter of small pipe size 14 mm, dynamic viscosity of water is $\mu = 1 \times 10^{-3} \text{ N.s/m}^2$, roughness of the pipe surface is $\epsilon = 0.0015 \text{ mm}$. Answer Problems (4-5):

4) The Reynolds number is:

- a. 2100.12
- b. 18189.14
- c. 57142.86
- d. 36378.27
- e. None of the above

5) The friction factor is:


- a. 0.018
- b. 0.034
- c. 0.043
- d. 0.027
- e. None of the above

Done



More

Diameter of hemispherical cup = 0.06 m

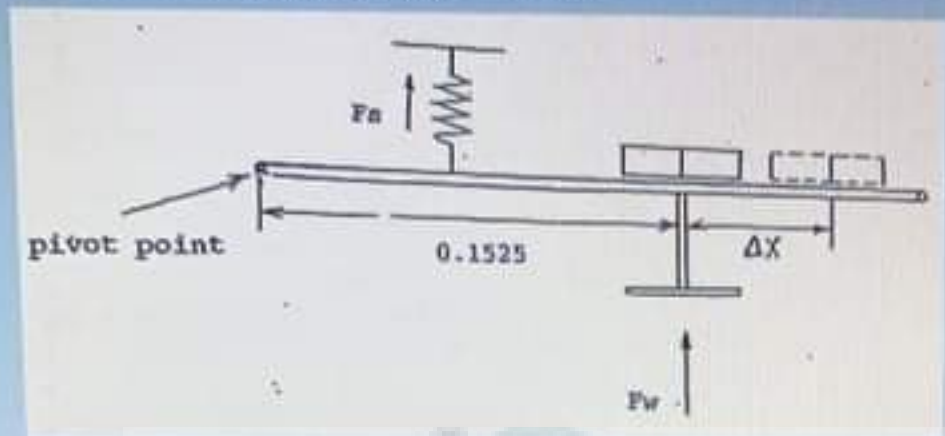


Time left

Results for the flat plate

Mass of water (kg)	Time (s)	Δx (mm)
7.5	14.27	75

The theoretical jet force in N is:

Answer:

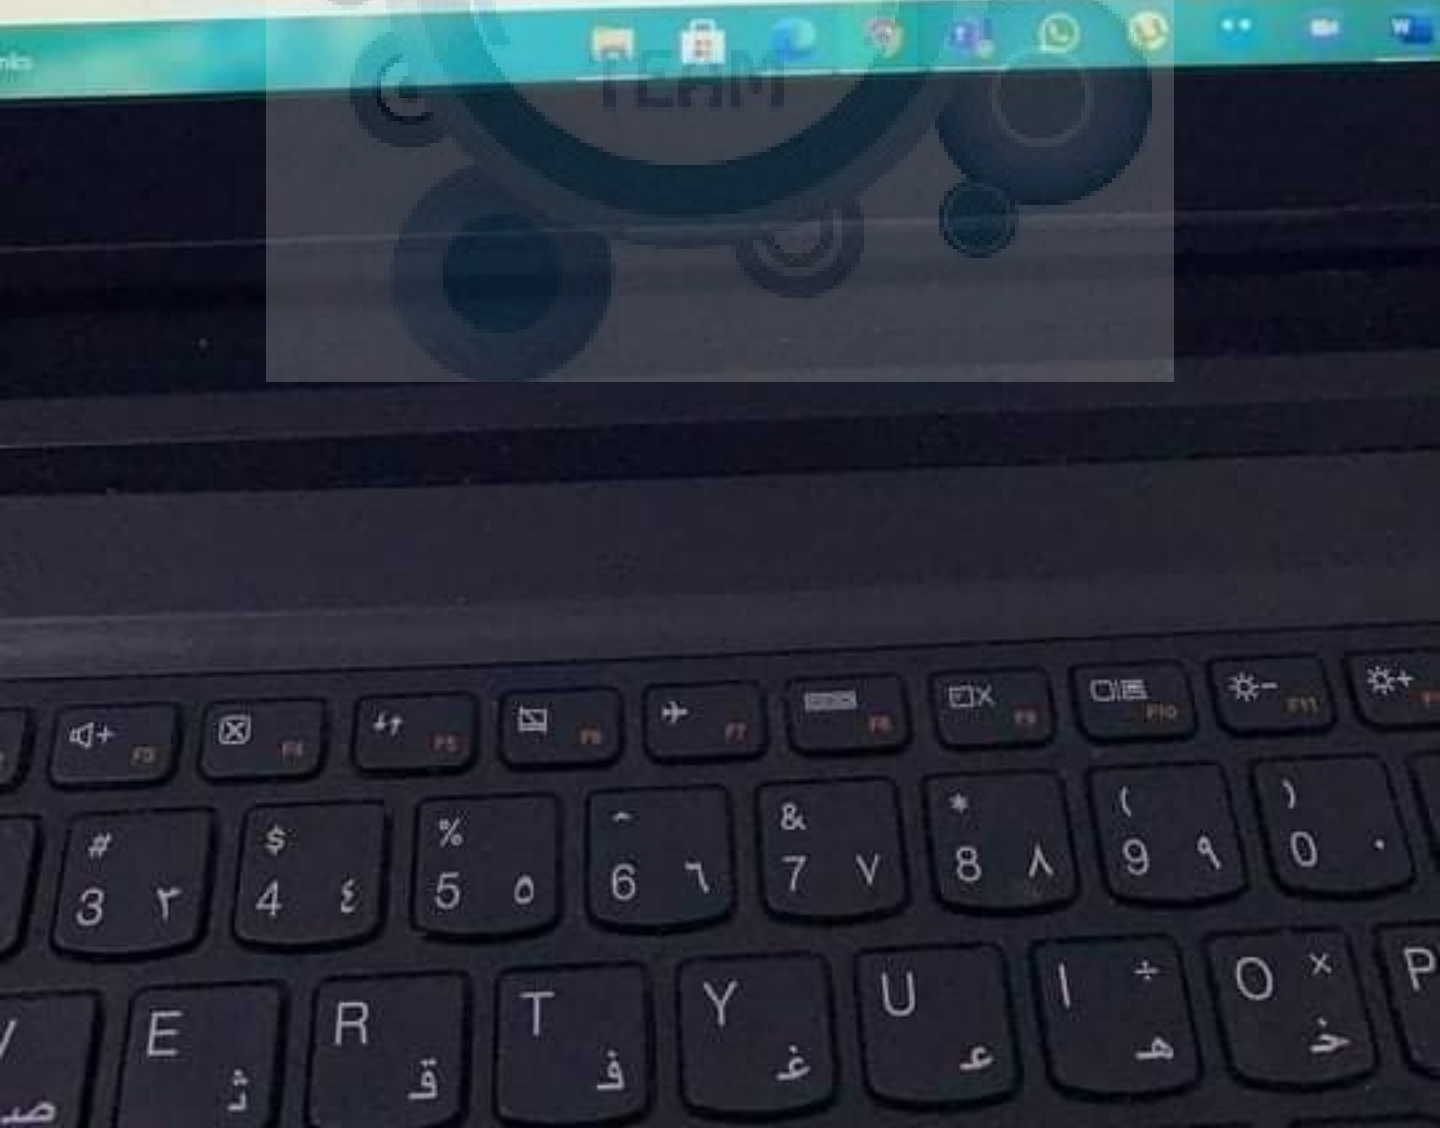

Done

Indel pressure to the throat pressure

True ☐False ☒

In the Hydrostatic Pressure Force on a Plane Surface Experiment, The pressure forces on the four surfaces other than the rectangular area were ignored because they are too small

True ☒False ☐

In the Thermal Conductivity Experiment, The temperature gradient with the specimen is higher than that within the copper specimen

True ☐False ☒

More

Done

State whether each of the following statements is True (T) or False (F)

In the Thermal Conductivity Experiment, The specimens were heated up using hot water

True ☐

False ☒

In the Impact of a Water Jet Experiment, The force on the plate would be the same if the plate is vertical or inclined

True ☐

False ☐

In the Losses in Pipe Bends Experiment, The minor losses are due to friction and pipe fitting

True ☐

False ☐

More

1. In the above experiment, density of water is $\rho = 1000 \text{ kg/m}^3$, dynamic viscosity of water is $\mu = 1.0 \times 10^{-3} \text{ Pa}\cdot\text{s}$. With the following parameters, fill the table below. (10 pts.)

Dark Blue Circular (DBCO) Sample Pipe

Length = 944.7 mm

Inside diameter = 13.6 mm

Large diameter = 20.7 mm

Pipe material: Polypropylene (PP) = 0.0017 mm

m (kg)	Q (L)	m (kg/s)	V (m/s)	Flow Type	Re (laminar)	Re (turbulent)	Sw (Pa)	h _f (m)	h _f (m)
7.5	29.08				610	3400			

turbulent

0.0286

$$\dot{m} = \frac{m}{t} = \frac{7.5}{29.08} = 0.2579 \text{ kg/s}$$

$$\dot{m} = \rho V A \Rightarrow A = \frac{\dot{m}}{\rho V} = \frac{0.2579}{1000 \times 1.775} = 1.452 \times 10^{-4} \text{ m}^2$$

$$V = \frac{\dot{m}}{\rho A} = \frac{0.2579}{1000 \times 1.452 \times 10^{-4}} \Rightarrow 1.775 \text{ m/s}$$

$$Re = \frac{\rho V D}{\mu} = \frac{1000 \times 1.775 \times 13.6 \times 10^{-3}}{1.8 \times 10^{-3}} = 13413.74$$

$$h_f = f \frac{LV^2}{2Dg} \Rightarrow f = \frac{2Dg h_f}{LV^2}$$

$$= \frac{2 \times 13.6 \times 10^{-3} \times 9.81 \times 270 \times 10^{-3}}{914.4 \times 10^{-3} \times 1.775^2} = 0.025 \text{ (m)}$$



More



Edit

④ & ⑤ : Losses in Pipes

$\dot{m} = 0.2 \text{ kg/s}$, $\rho = 1000 \text{ kg/m}^3$, $D_{\text{small}} = 14 \text{ mm}$, $\mu = 1 \times 10^{-3} \frac{\text{N}\cdot\text{s}}{\text{m}^2}$

$\epsilon = 0.015 \text{ mm}$

④ $\rightarrow Re = \frac{\rho U D_{\text{small}}}{\mu} = \frac{1000 \left(\frac{\dot{m}}{\rho A} \right) D_{\text{small}}}{\mu} \rightarrow Re = 18189.14$

$Re = 18189.14$, Turbulent flow

⑤ $\frac{1}{\sqrt{f}} = -2.0 \log \left(\frac{0.015/12}{2.72 \times 10^{-3}} + \frac{2.51}{Re \sqrt{f}} \right)$

$f = 0.027$ (d)

⑥ c

⑬

$\dot{m} = 0.25 \text{ kg/s}$, $\rho = 1000 \text{ kg/m}^3$, $D_{\text{small}} = 14 \text{ mm}$, $\mu = 1 \times 10^{-3} \frac{\text{N}\cdot\text{s}}{\text{m}^2}$, $h_m = 0.1 \text{ m}$

$h_m = K \frac{V^2}{2g}$

$0.1 = K \frac{(1.624)^2}{2(9.81)}$

$\dot{m} = \rho U A$

$0.25 = (1000) U \times \frac{\pi}{4} (14 \times 10^{-3})^2$

$\therefore U = 1.624 \text{ m/s}$

$K = 0.744$ (a)

7.5

14.27

75

The theoretical jet force in N is:

Answer: 3.51 N

You must enter a valid number. Do not include a unit in your response.

The experimental jet force in N is:

Answer: 2.943

Done

CanScanner 05-05-2020 00:41:53

docs.google.com/forms/d/e/1FAIpQL5bP06D3s58KVywdetQ3ewWbfz10kEZO8W...

واتساب

In the Hydrostatic Pressure Force on a Plane Surface Experiment, The level of water in the tank was measured using a regular scale.

True ☒

False ☐

In the Losses in Pipe Bends Experiment, Losses in gate valves are affected by the degree of their opening.

True ☒

False ☐

In the Hydrostatic Pressure Force on a Plane Surface Experiment, The location of the center of pressure is not the same if different fluids are used.

True ☐

False ☒

KAIZEN TEAM

More

⑩ Heat Pump

$$\dot{Q}_H = 1.9 \text{ kW}, \dot{Q}_L = 1.4 \text{ kW}, T_H = 60^\circ\text{C}, T_L = 7^\circ\text{C}$$

$$\text{COP}_{\text{HP}} = \frac{Q_H}{Q_H - Q_L} = \frac{1.9}{1.9 - 1.4} = \underline{3.8} \quad (\text{b})$$

⑪ Liquid-Vapor

①

$$\textcircled{20} \left(\frac{dT}{dp} \right)_{\text{sat}} = \frac{T_{\text{veg}}}{h_{\text{fg}}} \quad [\text{K/kPa}]$$

$$= (133.5 + 273) \text{ K} \cdot \frac{(0.6057) \text{ m}^3}{\text{kg} \cdot 2164 \frac{\text{kJ}}{\text{kg}}}$$

$$\left[\frac{\text{K} \cdot \text{m}^3}{\text{kg} \cdot \frac{\text{kJ}}{\text{kg}}} \right]$$

$$\times \left(\frac{dT}{dp} \right)_{\text{sat}} = 0.114 \frac{\text{K}}{\text{KPa}}$$

②

HAIZEN
TEAM

In the Flow Through a Nozzle Experiment, The chest pressure has to be constant
for a given mass flow rate of working fluid

Q. 11 12 13 14 15

Search Save & Continue to Next Question

KAIZEN TEAM

True ☐

False ☒

⑥ Impact of water jet

$$\rho = 1000 \text{ kg/m}^3; \dot{m} =$$

hemispherical cup

$$F_{th} = 2 \dot{m} u_0$$

$$= 2(0.4) (5.0153)$$

$$= 4.01224 \text{ N}$$

$$\approx 4.01$$

⑥

$$0.4 \frac{\text{kg}}{\text{s}}; S = 0.04 \text{ m}; D_{\text{jet}} = 0.01 \text{ m}$$

$$\dot{m} = \rho u A_{\text{nozzle}}$$

$$0.4 = (1000) u \times \frac{\pi}{4} (0.01)^2$$

$$u = 5.093 \text{ m/s}$$

$$u_0^2 = u^2 - 2gS \Rightarrow u_0 = \sqrt{5.093^2 - 2(9.81)(0.04)}$$

$$* u_0 = 5.0153 \text{ m/s}$$

16) In the losses experiment, if the following data were measured for the Expansion section: mass flow rate of 0.25 kg/s, the density of water is $\rho = 1000 \text{ kg/m}^3$, diameter of small pipe size 14 mm, dynamic viscosity of water is $\mu = 1 \times 10^{-3} \text{ N.s/m}^2$, the minor head loss is 0.1 m. The loss coefficient K is:

- a. 0.744
- b. 4.464
- c. 0.595
- d. 1.116
- e. None of the above

17) In pump characteristics experiment, for the centrifugal pump the following data were recorded: the suction pressure is 0 bar, the delivery pressure is 0.4 bar, the volume flow rate is $1 \times 10^{-3} \text{ m}^3/\text{s}$, the water density is 1000 kg/m^3 , the spring load is 17.64 N, the motor speed is 17 rev/s and the torque arm radius is 0.15 m. The volumetric efficiency of the pump is:

- a. 0.83
- b. 0.55
- c. 0.69
- d. 0.49
- e. None of the above

18) In heat pump experiment, the high-temperature heat rate was 1.9 kW and the Low-temperature heat rate was 1.4 kW. The high-temperature was 60°C and the low-temperature was 7°C . The actual coefficient of performance of the heat pump is:

- a. 2.31
- b. 3.80
- c. 3.16
- d. 2.38
- e. None of the above

19) In "thermal conductivity" experiment

Thermal conductivity of the specimen is dependent on temperature difference across specimen	
a. Higher temperature difference across the specimen and smaller cross-section area yields more heat conducted through the specimen	
b. Temperature of circulating water is measured using thermocouple	
c. Thermal conductivity is independent from heat path length (x) and cross section area (A) of the specimen	
d. All of the above	

20) In the liquid-vapor saturation curve experiment, calculate the theoretical T-P saturation slope (i.e. $(\frac{dT}{dP})_{\text{sat}}$) at absolute pressure of 3 bar. (3 bar = 160 kPa)

- a. 0.114 K/kPa
- b. 0.099 K/kPa
- c. 0.158 K/kPa
- d. 0.075 K/kPa
- e. None of the above

For the following multiple choice questions, choose the *most correct* answer. For computations, show the detailed solution for each question to guarantee the grade. (2 points each)

[1-2]: In center of pressure experiment, if the plane surface is partially immersed, the water level $h=4.0$ cm, and the width of immersed surface $b=7.5$ cm. ($\gamma_{\text{water}} = 9810 \text{ N/m}^3$). Answer Problems (1-2):

$$b = 7.5 \text{ cm} \quad \gamma_{\text{water}} = 9810 \text{ N/m}^3$$

$$h = 4.0 \text{ cm}$$

- 1) The hydrostatic pressure force on the plane surface is:
- 0.59 N
 - 0.33 N
 - 0.07 N
 - 0.13 N
 - None of the above

- 2) The theoretical center of pressure measured from the surface of the water is:

- 3.33 cm
- 1.33 cm
- 2.67 cm
- 2.00 cm
- None of the above

- 3) Thermal conductivity of a material is

a. The resistance of a material to conduct heat through	
b. The ability of a solid material to store heat	
c. The ability of a material to conduct heat	
d. A measure of liquid's ability to convert heat	
e. All of the above	

[4-5] In the losses experiment, if the following data were measured: mass flow rate of 0.2 kg/s , density of water is $\rho = 1000 \text{ kg/m}^3$, diameter of small pipe size 14 mm , dynamic viscosity of water is $\mu = 1 \times 10^{-3} \text{ N.s/m}^2$, roughness of the pipe surface is $\epsilon = 0.0015 \text{ mm}$. Answer Problems (4-5):

$$\rho = 1000 \text{ kg/m}^3$$

- 4) The Reynolds number is:
- 2100.12
 - 18189.14
 - 37142.86
 - 36378.27
 - None of the above

- 5) The friction factor is:

- 0.018
- 0.034
- 0.043
- 0.027
- None of the above

③ c

The final conductivity

⑫ X

⑪

⑩

改善
KAIZEN
TEAM

9	0.5	300
10	0.75	290
11	1	260
12	1.25	220
13	1.5	220

Time left

The experimental $(P_1 / P_0)_{exp}$ ratio is:

Answer:

The theoretical $(P_1 / P_0)_{theo}$ ratio for air is:

Answer:


Question 6
yet
wered
ked out of
lag
estion

20...pdf thermal-water-jet.pdf

Links



Done

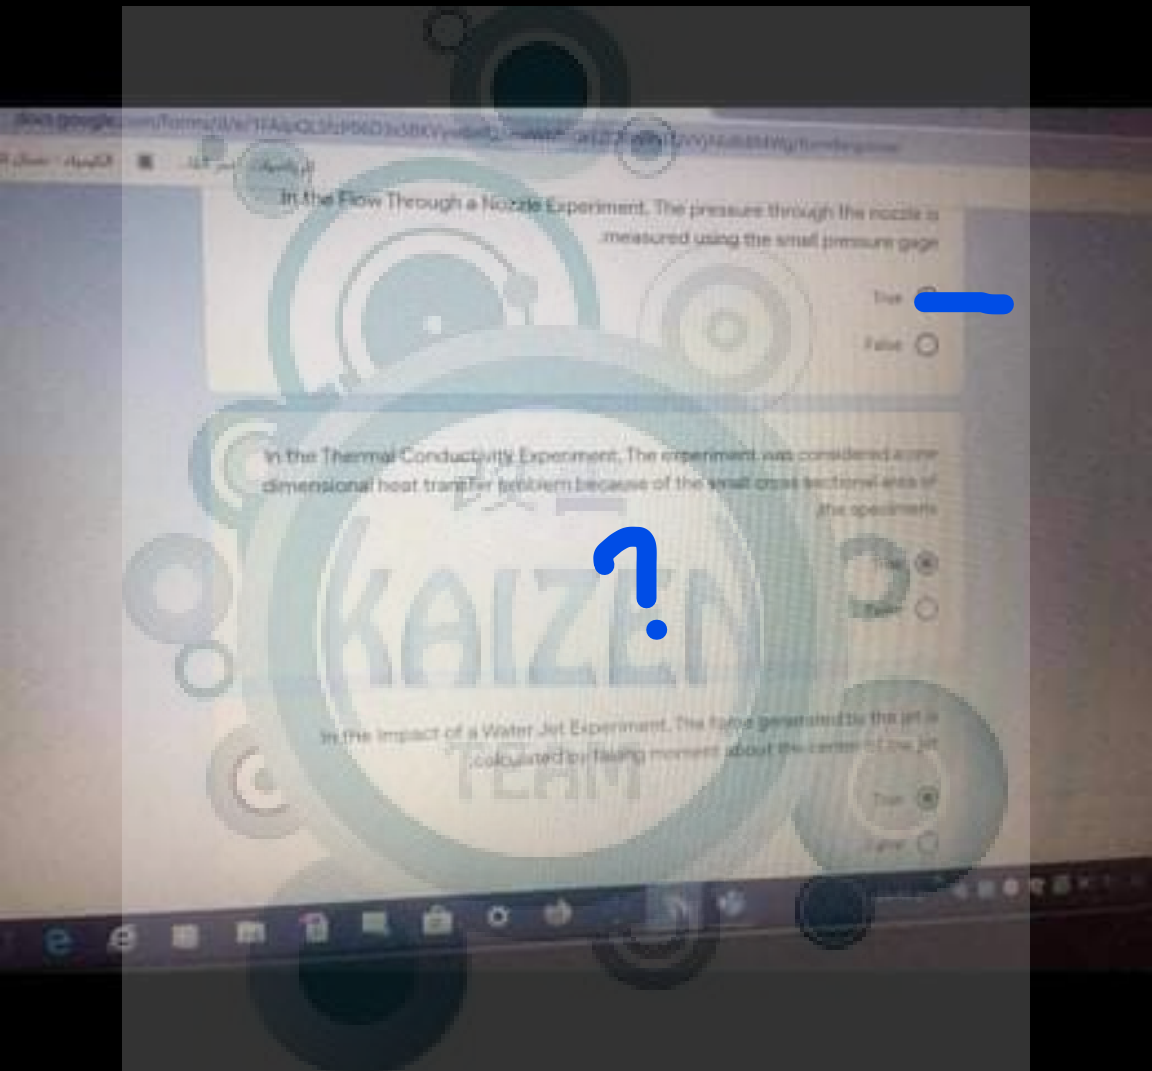

More

2. In flow through a nozzle experiment with the following conditions: 100 mm tube below, 40 mm ϕ

The throat diameter is as follows:
 For the convergent nozzle $\phi = 6.25$ mm
 For the convergent-divergent nozzle $\phi = 6.25$ mm
 For the convergent-divergent nozzle $\phi = 6.77$ mm
 Probe diameter $\phi = 3.33$ mm

Atmospheric pressure = 90 kPa, atmospheric temperature = 25°C, $R = 287.16$ J/kg $\cdot$ K, $\gamma = 1.4$

Table 1. The data collected in gauge pressure

Position no.	X/L	$P_{01} = 500$ kPa Position pressure kPa
7	0.0	500
8	0.25	490
9	0.5	490
10	0.75	480
11	1	420
12	1.25	360
13	1.5	365

P_1 (gauge)	(P_1 / P_{atm})	ρ_1 (kg/m ³)	P_{01} / P_{atm}
500 kPa			

P_T gauge $\rightarrow \frac{P_1}{P_0} = \frac{420 + 90}{500 + 90} = 0.8644$

$\rightarrow \dot{m}_2 = A_1 P_0 \left(\frac{P_1}{P_0} \right)^{\frac{1}{\gamma}} \sqrt{\frac{2\gamma}{(\gamma-1)RT_0} \left(1 - \left(\frac{P_1}{P_0} \right)^{\frac{\gamma-1}{\gamma}} \right)}$
 $A_1 = \frac{\pi}{4} (4.77^2 - 3.33^2) \times 10^{-6} = 9.16 \times 10^{-6}$
 $= 9.0512 \times 10^{-3}$ kg/m

$\frac{P_{back}}{P_{chest}} = \frac{P_{atm}}{P_0 + P_{atm}} = \frac{90}{500 + 90} = 0.1529$



More



Edit

water (kg)	(V)	(mm)
7.5	14.27	75

The theoretical jet force in N is:

Answer: 3.51

The experimental jet force in N is:

Answer: 2.943


Question 4

Not yet
answered

Marked out of
1.00

Flag
question

Done

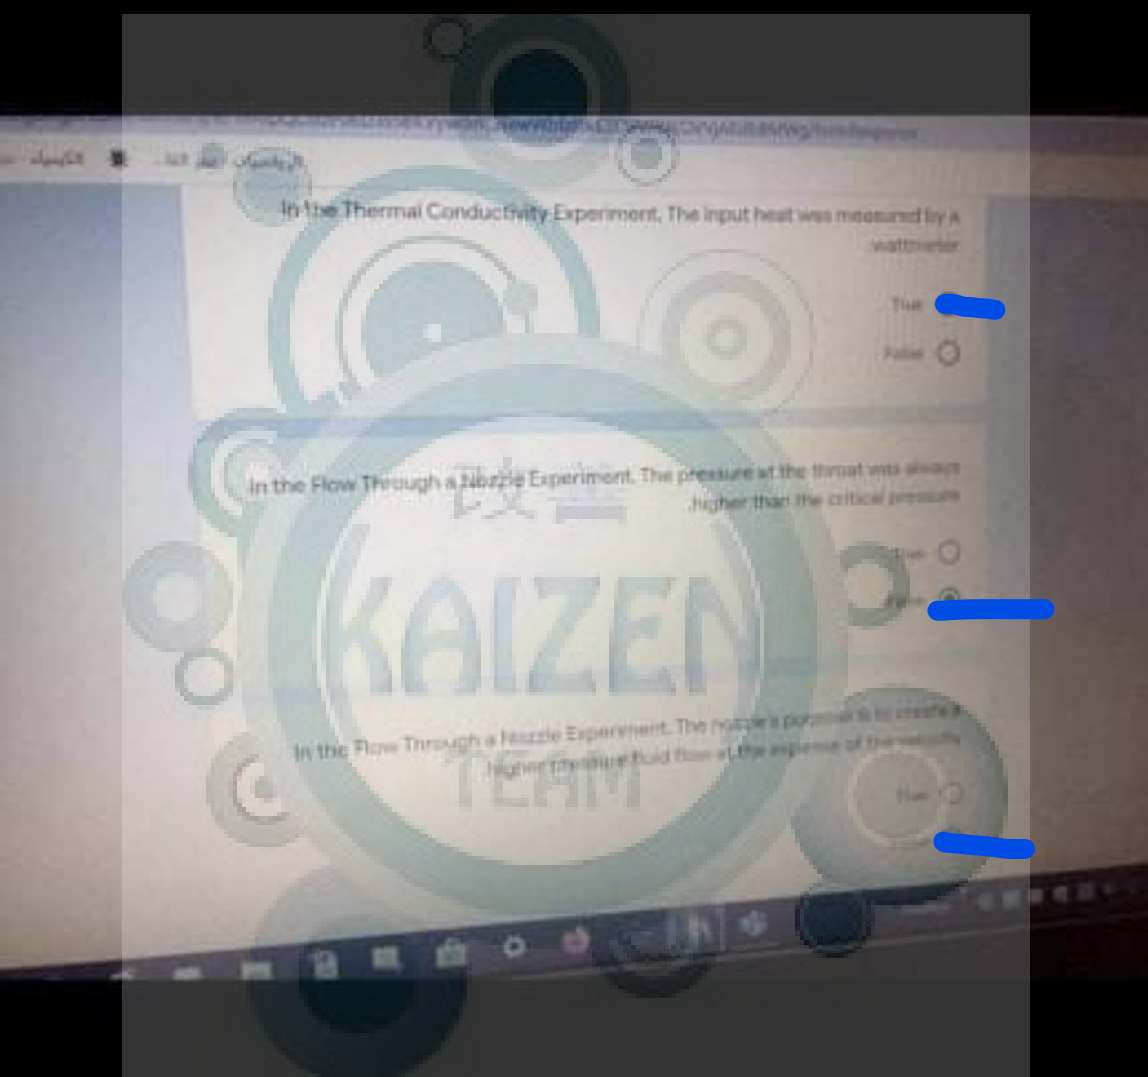

More

Done

el Exam

x CanScanner 05-05-2020 3:24 x

https://www.gigamonitors.com/1FAIpQL5fzN0G1z5BKVywidetQ3seWb1zEtK-EZ06WhtCOVjA5dell

State whether each of the following statements is True (T) or False (F)

In the Losses in Pipe Bends Experiment, The friction factor is a function of Reynolds number

True ☒False ☐

In the Losses in Pipe Bends Experiment, The head loss due to fittings is proportional to the kinetic energy

True ☒False ☐

In the Impact of a Water Jet Experiment, The force on the plate is proportional to its area

True ☐False ☒

More

Equations sheet

$$Re = \frac{\rho V D}{\mu}, \quad m = \rho V A, \quad K = {}^{\circ}C + 273, \quad P_{abs} = P_{gage} + P_{atm}, \quad (dT/dP)_{sat} = v_f g^T / h_{fg}, \quad g = 9.81 \text{ m/s}^2$$

$$h_c = h_f + \Sigma h_m, \quad h_m = K \frac{v^3}{2g}, \quad h_f = f \frac{L}{D} \frac{v^3}{2g} \quad \text{Laminar: } f = \frac{64}{Re}, \quad \text{Turbulent: } \frac{1}{f} = -1.8 \log \left[\frac{64}{Re} + \left(\frac{1}{5.75} \right)^{1.11} \right]$$

$$\bar{p} = \rho g h_c, \quad F = \rho g h_c A, \quad \gamma_{cp} = \gamma_c + \frac{\gamma_{rel}}{\gamma_{rel}}, \quad \text{For water: } \rho = 1000 \text{ kg/m}^3$$

$$F = m(u_o - u_i \cos \beta), \quad u_o^2 = u^2 - 2gs, \quad m = \rho u A, \quad \text{Bernoulli equation: } \frac{p}{\rho g} + \frac{v^2}{2g} + z = \text{constant}$$


$$\dot{Q} = m c (T_{out} - T_{in}), \quad \dot{Q} = -k A \frac{dT}{dx}$$

$$\frac{r_o}{R_c} = \left(\frac{2}{v+1} \right)^{\frac{1}{v-1}}, \quad v_c = \sqrt{\frac{2 \Delta T_c}{(v-1) T_c}} \left[1 - \left(\frac{D_c}{D_o} \right)^{\frac{2v}{v-1}} \right], \quad m_1 = A_1 \rho_1 \left(\frac{D_1}{D_2} \right)^{1/2} \sqrt{\frac{2x}{(v-1) \Delta T_c}} \left[1 - \left(\frac{D_2}{D_1} \right)^{\frac{2v}{v-1}} \right], \quad v = \frac{2x}{L_c}$$

$$h_p = \frac{\Delta p}{\rho g} \times 10^3, \quad \Delta p = p_a - p_b, \quad P_{water} = \rho g \dot{Q} h_p \times 10^{-3}, \quad P_{water} = 2 \pi \omega P R \times 10^{-3}, \quad \eta_p = \frac{P_{actual}}{P_{ideal}}, \quad \eta_v = \frac{\dot{Q}_1}{\dot{Q}_2}$$

$$\dot{Q}_c = \frac{8}{15} \times 10^{-3} \omega_{pump}, \quad \omega_{pump} = 2 \omega_m \text{ and } m = \rho \dot{Q}, \quad \eta_h = 0.00105 \sqrt{\frac{5.5}{T_c}}, \quad \dot{Q}_H - \dot{W}_i - \dot{W}_p = \dot{Q}_1$$

$$COP_{HP} = \frac{\dot{Q}_H}{\dot{Q}_H - \dot{Q}_1}, \quad COP_{HP,rev} = \frac{1}{1 - T_1/T_H}, \quad COP_R = \frac{\dot{Q}_1}{\dot{Q}_H - \dot{Q}_1}, \quad COP_{R,rev} = \frac{1}{T_H/T_C - 1}$$

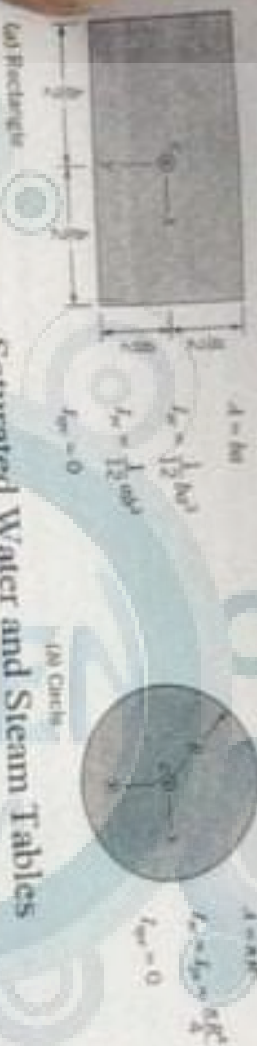

Saturated Water and Steam Tables

Pressure bar	Temperature °C	(v_{fg}) m^3/kg	(h_{fg}) kJ/kg
1	99.60	1.6940	2258
2	120.2	0.8856	2202
3	133.5	0.6057	2164
4	143.6	0.4623	2134
5	151.8	0.3748	2109
6	158.8	0.3156	2087
7	165.0	0.2728	2067
8	170.4	0.2403	2048

6) In impact of water jet experiment, the water density is 1000 kg/m^3 , the mass flow rate is 0.4 kg/s , the height of vane above nozzle outlet is 0.04 m and the diameter of nozzle is 0.01 m . If a hemispherical cup is used, the theoretical water jet force is:

- 6.30 N
- 4.01 N
- 7.64 N
- 5.10 N
- None of the above

7) In "Flow through a nozzle" experiment, one of the following statements is correct:

a. Throat pressure is minimum pressure reading inside the nozzle
b. Throat pressure is maximum pressure reading inside the nozzle
c. Mass flow rate is minimum if the nozzle is choked
d. Throat pressure is the gage pressure reading of the air supply tank
e. None of the above

8) Only one of the following statement is correct with regards to the Flow through a nozzle experiment:

a. As pressure increases in the direction of the flow in the nozzle, velocity decreases
b. Both pressure and velocity decrease through the nozzle
c. Mass flow rate of the air increases as the area of the nozzle decreases
d. Cross section area of the nozzle increases in the direction of the flow
e. As the velocity increases in the direction of the flow, pressure decreases

9) In flow through a nozzle experiment, the stagnation "chest" absolute pressure is 290 kPa , the stagnation "chest" temperature is 18°C , the air gas constant is $0.287 \text{ kJ/kg}\cdot\text{K}$, the air specific heat ratio is 1.4 , the nozzle throat area is $9.16 \times 10^{-6} \text{ m}^2$ and the throat absolute pressure is 265 kPa . The mass flow rate at the nozzle throat is:

- $3.63 \times 10^{-3} \text{ kg/s}$
- $2.92 \times 10^{-3} \text{ kg/s}$
- $1.84 \times 10^{-3} \text{ kg/s}$
- $2.34 \times 10^{-3} \text{ kg/s}$
- None of the above

10) In losses in pipes experiment, pressure change in globe valve is measured using:

a. Pressurized piezometer tube
b. Piezoelectric gage pressure
c. U-tube manometer
d. Pitot-static tube
e. None of the above

11) The type of the nozzle used in the "flow through a nozzle" experiment is:

a. Divergent-Parallel
b. Convergent-Parallel
c. Convergent-divergent
d. Divergent-divergent
e. None of the above